

# QLD0561 Series

Compact Visible Laser Module with Fiber Pigtail

C00123-07 July 2024



## 1. DESCRIPTION

The QLD0561 series is a visible laser module based on the frequency doubling of NIR distributed feedback (DFB) laser. The laser is assembled into a compact flat package with fiber pigtail.

## 2. FEATURES

- 532, 561 and 594nm light source
- High fiber output power (MMF/SMF/PMF)
- Low power consumption
- Low intensity noise
- Narrow spectral linewidth
- Short pulse operation
- Small size

## 3. APPLICATIONS

- Spectroscopy
- Fluorescence microscope
- Time resolved measurement
- Interferometry



## 4. ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATING	UNIT
DFB forward current		$I_{DFB}$	250	mA
DFB forward voltage		$V_{DFB}$	2.5	V
DFB reverse voltage		$V_{rDFB}$	2	V
SOA forward current		$I_{SOA}$	320	mA
SOA forward voltage		$V_{ISOA}$	3	V
SOA reverse voltage		$V_{rSOA}$	2	V
Fiber output power	QLD0561-32xx	Multi-mode fiber	30	mW
	QLD0561-61xx	Single-mode fiber	25	
	QLD0561-94xx	Multi-mode fiber	5	
		Single-mode fiber	3	
Heater power		$P_{ht}$	0.3	W
Module operating temperature		$T_{op}$	20 to 30	°C
Storage temperature		$T_{st}$	-10 to 50	°C

**5. OPTICAL AND ELECTRICAL CHARACTERISTICS**

 ( $T_C = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	CONDITION	MIN	TYP	MAX	UNIT	
DFB operation current		$I_{opDFB}$	CW, $P_f = P_{op}$	-	150	220	mA	
DFB operation voltage		$V_{opDFB}$	CW, $P_f = P_{op}$	-	1.8	2.4	V	
SOA operation current		$I_{opSOA}$	CW, $P_f = P_{op}$	-	200	320	mA	
SOA operation voltage		$V_{opSOA}$	CW, $P_f = P_{op}$	-	1.7	3.0	V	
Heater current		$I_{heater}$	-	0	-	100	mA	
Heater resistance		$R_{heater}$	-	-	30	-	$\Omega$	
Fiber output power	QLD0561-32xx	Multi-mode fiber	$P_f$	CW	25	-	-	mW
	QLD0561-61xx	Single-mode fiber			15	-	-	
	QLD0561-94xx	Multi-mode fiber			4	-	-	
		Single-mode fiber			2	-	-	
Power consumption		$P_c$	CW, $P_f = P_{op}$	-	0.8	-	W	
Peak wavelength	QLD0561-32xx		$\lambda_p(1)$	CW, $P_f = P_{op}$	530	532	534	nm
	QLD0561-61xx				559	561	563	nm
	QLD0561-94xx				592	594	596	nm
Spectral linewidth		$\Delta\lambda$	CW, $P_f = P_{op}$	-	-	0.1	nm	
Polarization extinction ratio (2)		PER	CW, $P_f = P_{op}$	12	-	-	dB	
Thermistor Resistance		$R_{th}$	$T_C = 25^\circ\text{C}$ , $B=3375\text{K}$	9.5	10	10.5	k $\Omega$	

(1) Peak wavelength tolerance of +/- 1nm is available as an option.

(2) Specification for PMF pigtail option.

**6. PRODUCT PART NUMBER**

QLD0561- [ ] [ ] [ ] - [ ] [ ]

a b c d

(d) Fiber Type:


 (a) Wavelength: 32-532nm  
61-561nm  
94-594nm

 (b) Output power: 02- 2mW  
04- 4mW  
15- 15mW  
20- 20mW  
25- 25mW

 (c) Connector Type: 2- FC/PC  
3- FC/APC

 1- MMF 50um core/250um coating  
2- MMF 105um core/250um coating  
3- SMF 245um coating  
4- PMF 245um coating  
5- MMF 200um core/320um coating  
6- SMF of Nufern S405XP  
7- PMF of Nufern PM-S405-XP

## 7. OUTLINE DRAWING AND PIN CONFIGURATION

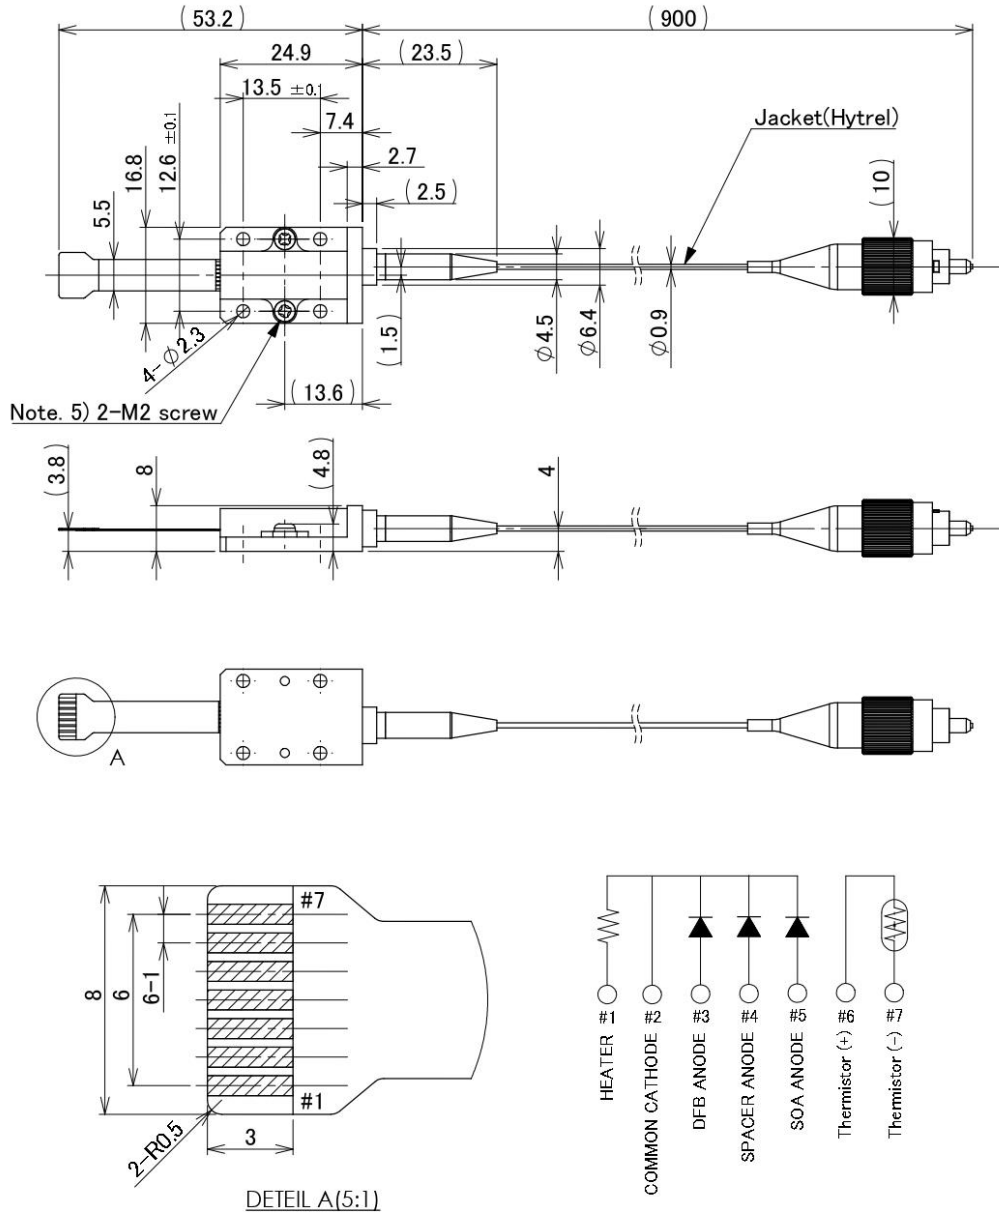

### Notes.

1. All dimensions are in millimeters
2. Tolerance  $\pm 0.2$ mm, unless otherwise specified
3. Recommended FPC-connector: JST 07FM-1.0
4. Recommended screw torque:  $4 \times 0.1$  N.m
5. Do not remove 2-M2 screw
6. The polarized direction of PMF is cf. right figure

## 8. SETUP AND OPTICAL POWER ADJUSTMENT PROCEDURE

- Setup

Introduce individual current sources for DFB and SOA with common cathode. Spacer anode pin should be left open for normal operation. If required, introduce the other current source for heater pin. Thermistor pins can be used for temperature monitoring of the module.

- Optical power adjustment

With measuring optical power,

- (1) Adjust DFB (and Heater) current so that the optical power becomes the maximum.
- (2) Adjust SOA current to obtain the required power within the maximum rating.
- (3) If needed, repeat the procedure of (1) to (2).

## 9. NOTICE

- Safety Information

This product is classified as Class 3B laser product, and complies with 21 CFR Part 1040.10.

Please do not take a look at laser lighting in operations since laser devices may cause troubles to human eyes.


Please do not eat, burn, break and make chemical process of the products since they contain GaAs material.

- Handling products

Semiconductor lasers are easily damaged by external stress such as excess temperature and ESD.

Please pay attention to handling products, and use within range of maximum ratings.

QD Laser takes no responsibility for any failure or unusual operation resulting from improper handling, or unusual physical or electrical stress.

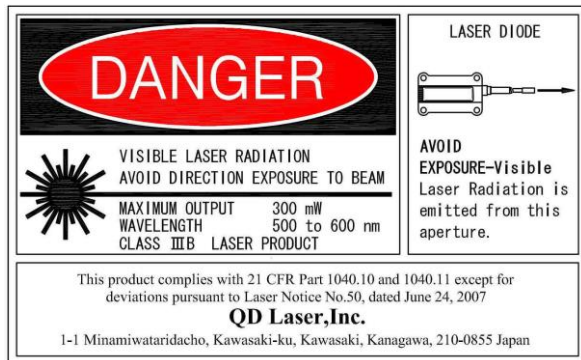

**QD Laser, Inc.**

Contact: [info@qdlaser.com](mailto:info@qdlaser.com) <http://www.qdlaser.com>

Copyright 2014-2024 All Rights Reserved by QD Laser, Inc.

Keihin Bldg. 1F 1-1 Minamiwatarida-cho, Kawasaki-ku, Kawasaki, Kanagawa Zip 210-0855 Japan

All company or product names mentioned herein are trademarks or registered trademarks of their respective owners. Information provided in this data sheet is accurate at time of publication and is subject to change without advance notice.